


# Owl 640 T

640 x 512, VIS-SWIR Camera

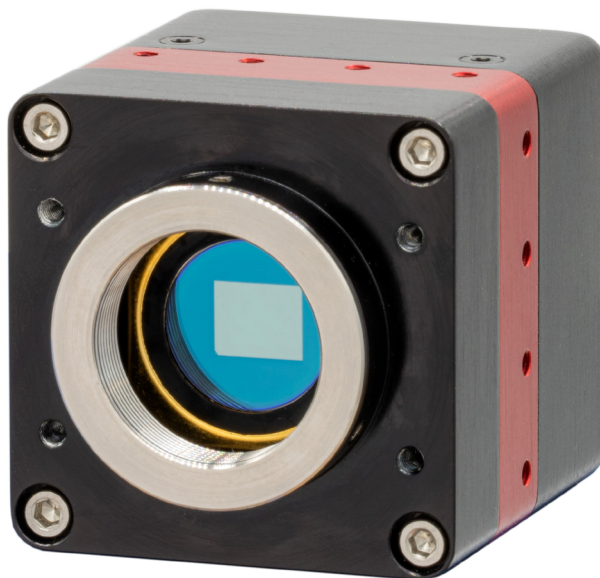

## Key Features and Benefits

- **640 x 512, 10 $\mu$ m pitch VIS-SWIR sensor**  
VGA resolution imaging from 0.6 $\mu$ m to 1.7 $\mu$ m
- **On-board Intelligent 3 point NUC and ALC**  
Real time, optimal video in all light conditions
- **Designed for Harsh environments**  
High Shock, Vibration and extreme Temperature resistance
- **Global Shutter**  
>60Hz full frame video, with no distortion (ideal for triggering)
- **Low Noise Electronics**  
No artificial noise added, optimising low light capability

Resolution	640 x 512
------------	-----------

Frame Rate	10 to 60Hz
------------	------------

Camera Link	12 bit
-------------	--------

Wavelength Range	VIS-SWIR
------------------	----------

## Specification for Owl 640 T

Sensor	InGaAs PIN-Photodiode
Active Pixel	640 x 512
Pixel Pitch	10µm x 10µm
Active Area	6.4mm x 5.12mm
Spectral Response <sup>1</sup>	0.6µm to 1.7µm
Readout Noise (RMS) <sup>2</sup>	LG: <180e- (160e- typical) HG: <50e- (28e- typical)
Peak Quantum Efficiency	>90% @1.3µm
Full Well Capacity	LG: 450ke- HG: 10ke-
Pixel Operability	>99.5%
Dark Current (e/p/s) <sup>3</sup>	<19,000 @ 15°C
Digital Output Format	12 bit Camera Link (Base Configuration / SDR)
Exposure Time	LG: 10µs to 92.5ms HG: 10µs to 86.5ms
Shutter Mode	Global Shutter
Frame Rate	10 to 60Hz
Optical Interface	C Mount
Dynamic Range (Typ)	LG: 69dB HG: 51dB
Trigger Interface	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±0.5V
TE Cooling	Active
Image Correction	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ALC ROI
Camera Power Consumption	<4W with TEC ON, NUC ON
Operating Temperature <sup>4</sup>	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (excluding standard mounting) <sup>5</sup>	68mm x 50.00mm x 50.00mm
Weight	245g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors. This product is under the export control of the UK government and may be subject to a single individual export license before shipment. Note 1: Optional filters available: Low, High or bandpass. Note 2: Typical readout noise is calculated from an average of the last 20 cameras. Note 3: Measured in an ambient of 25°C with adequate heat sinking. For more detailed power consumption values, please refer to the user manual. Note 4: Extended operating temperature range on request. Note 5: Dimensions include all connector parts on the camera interface. Note 6: Two cables are required. The maximum cable length is 2m. For more information refer to user manual. Note 7: please consult us to check out our range of lenses.

## Specification for Owl 640 T

### Camera

OWL 640 T Digital Camera	OW1.7-VS-CL-640-T
Power Supply Cable	RPL-HR4-K

### Optional Accessories

Mini PC with XCAP STD and Frame Grabber	RPL-PC-mf2280
Thunderbolt Frame	RPL-mf2280
EPIX® EB1 Frame Grabber	RPL-EPIX-EB1
EPIX® XCAP STD Software	RPL-XCAP-STD
MDR-SDR CameraLink Cable (2m) <sup>6</sup>	RPL-MCL-CBL-2M
Optical SWIR Lenses <sup>7</sup>	RPL-xx-xxx

### Applications

#### Surveillance


- 860,1064 & 1550nm laser line detection
- Active Imaging
- Airborne Payload
- Handheld Systems
- Imaging through Fog
- Range Finding
- Vision Enhancement

#### Scientific

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semi Conductor Inspection
- Solar Cell Inspection
- Thermography

For detailed technical drawings, volume pricing or to set up a demo, contact us at [sales@raptorphotonics.com](mailto:sales@raptorphotonics.com)

Document#: INOW1.7-VS-CL-640T 0425

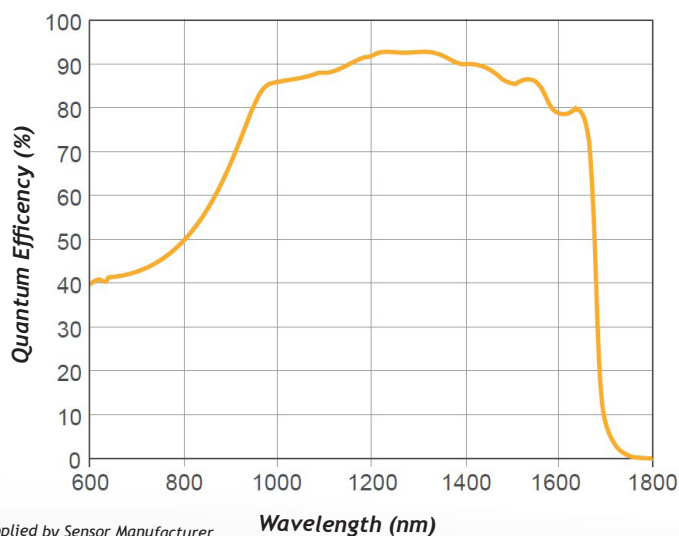

\*Data Supplied by Sensor Manufacturer