

__ TECHNICAL SPECIFICATIONS

Operating Frequency: 60 MHz (1.4 T)

Magnet: Permanent, no cryogens

User Interface: Built-in touchscreen or Windows, Mac or Linux

compatible

Nuclei: ¹H/¹⁹F/¹³C, ¹H/¹⁹F/³¹P, ¹H/¹⁹F/⁷Li, etc.

please inquire for more

Lock: Deuterium & non-deuterium options
Sample: Standard 5 mm NMR tubes, flow options
Compatibility: JCAMP-DX, Mnova, ACD/Labs, Delta, Topspin,

LabView

Resolution & Lineshape: LW(50%) ≤ 1.3 Hz

Sensitivity: 100:1 (1% EtBz single scan)

Stray Field: 2 Gauss line contained within enclosure

Operating Temperature: 18-26 °C

Power Supply: 100-240 VAC, 50-60 Hz Dimensions: 11.8 x 11.0 x 19.2"

30 x 28 x 49 cm

Weight: 58 lbs/26.5kg

For more information please visit:


www.nanalysis.com

MSH システムズ 株式会社 MSH Systems, Inc. 〒104-0032 東京都中央区八丁堀3-25-10

JR八丁堀ビル6階

TEL: 03-6659-7540 / FAX: 03-6659-7541 WEB: https://www.msh-systems.com

Specifications are subject to change without notice

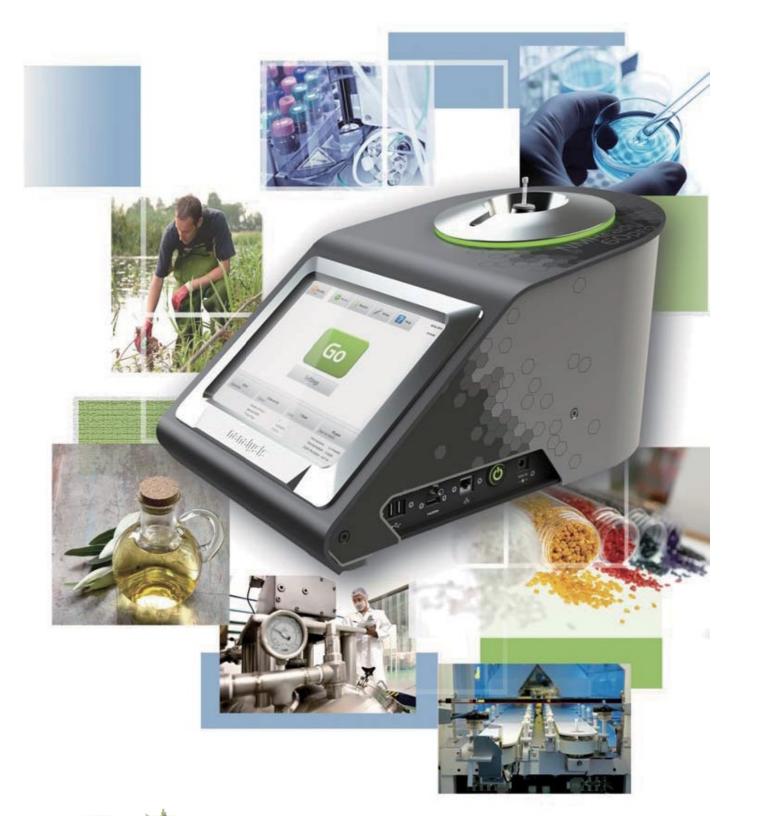



High Performance Multinuclear Compact NMR Spectrometer





MULTINUCLEAR CAPABILITIES



Each NMReady-60 PRO is a factory dual-tuned spectrometer. It can acquire spectra for two conventional spin active nuclei, thus enhancing its utility for characterizing a broad range of natural and synthetic complexes. Inquire for possible combinations of:

¹H, ⁷Li, ¹¹B, ¹³C, ¹⁵N, ¹⁹F, ²⁹Si, ³¹P, ¹²⁹Xe

PULSE PROGRAMS

The NMReady-60 PRO allows the user to load/customize pre-existing NMR experiments from a series of relaxation, 1D, homo- and hetero-nuclear 2D experiments, including, but not limited to:



Decoupling ✓ DEPT trio



✓ HSOC/HETCOR **✓** HMBC



Solvent suppression

Please inquire about experiment packages or our experiment designer.



Compact and Portable

The NMReady is the only all-in-one benchtop NMR spectrometer. It is easy to site with its small footprint & lightweight package.



US D.

Energy Efficient

The NMReady plugs into standard outlets, consumes minimal power & can be set to 'power-save' when not in use.



The NMReady is compatible with standard 5mm NMR tubes & typical NMR sample volumes.



The permament magnet does not require cryogens, weekly servicing or preventative maintenance. Convenient automated and standby shimming routines ensure that the instrument is always ready for use.



sure.

QUICK AND EASY-TO-USE

Improve work flow and increase research productivity with this revolutionary, high-performance 60 MHz NMR spectrometer that is easily incorporated into a laboratory management system.

Load, Customize or Design Experiments

In addition to loading existing NMR experiments, the user can also design their own multi-pulse, multi-channel experiments, specifying pulse widths, pulse power, evolution and mixing intervals.

Create Projects


Routine data collection can be simplified with secure, individual user logins and loadable experiments routines that can be modified or preset by site administration.



With the optional kinetics module, a user can automatically collect multi-spectra data over a set time interval.

Reaction monitoring, speciation plots are elementary with straightforward, onboard software for manual integration cuts and plotting functions.

Data can also be easily saved, printed, exported and processed using third party processing software tools.

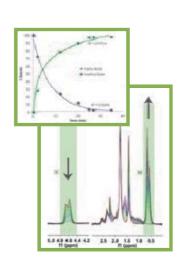

ACCESSIBLE & SECURE DATA

Secure login

✓ Print Save

> Local USB Ethernet netowrk

Wi-Fi network ✓ Process in 3 rd party software with JCAMP-DX files

Configure

Experiments are selected from simple drop down menus and loaded with standard acquisition parameters. These can be modified as desired from a series of convenient pop-up

Acquire

Once configured, data is collected by merely

Each scan is collected in seconds, depending on acquisition parameters. The first scan is displayed and updated every additional four scans.

Analyze

State-of-the-art onboard data processing cess and analyze 1D, 2D spectra on the instrument.

Additionally spectra are saved as standard JCAMP-DX files and are compatible with many third-party software tools.

